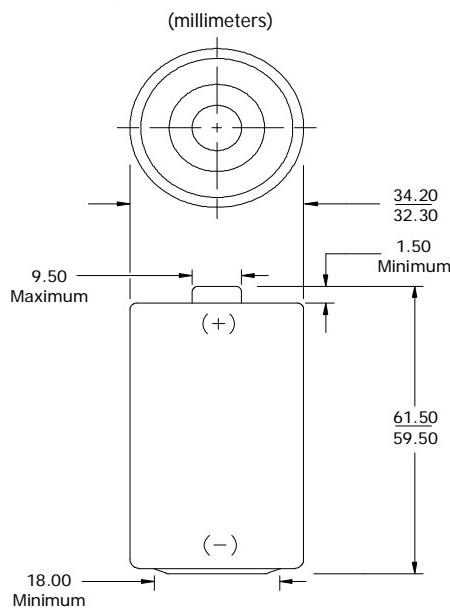
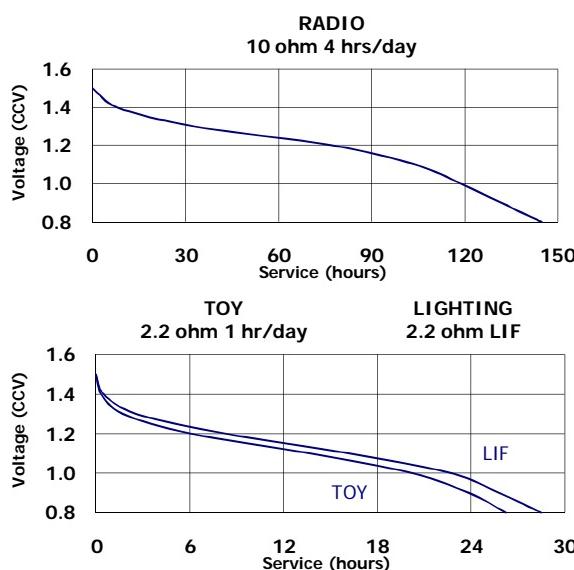




ENERGIZER E95**Industry Standard Dimensions****Industry Standard Testing (21°C):****Specifications**

Classification:	Alkaline
Chemical System:	Zinc-Manganese Dioxide (Zn/MnO ₂)
Designation:	No added mercury or cadmium
Nominal Voltage:	IEC-LR20
Nominal IR:	1.5 volts
Operating Temp:	150 to 300 milliohms (fresh)*
Typical Weight:	-18°C to 55°C
Typical Volume:	148.0 grams
Jacket:	56.0 cubic centimeters
Shelf Life:	Plastic Label
Terminal:	7 years at 21°C (80% of initial capacity)
	Flat Contact

* For additional information, please reference the IR technical white paper.

Milliamp-Hours Capacity

Continuous discharge to 0.8 volts at 21°C

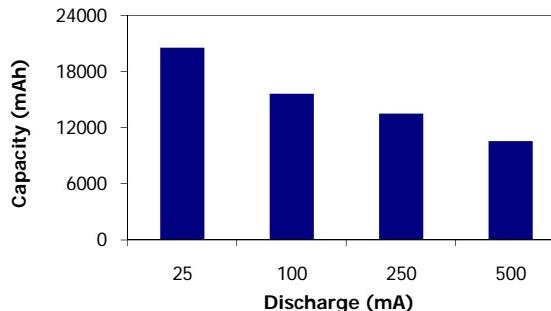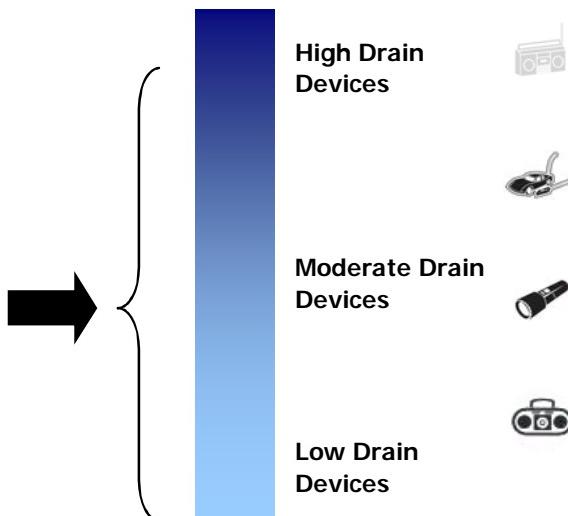**Battery Selection Indicator****Important Notice**

This datasheet contains typical information specific to products manufactured at the time of its publication.

©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.